# M-70 & S-70 SERIES

## Heavy Duty Water Saver Spray Nozzles

### Precision-made nozzles combining modern and innovative engineering.

Strahman nozzles are often noted as being the best on the market. Designed and built to withstand the most rugged applications, the operator can achieve any type of water stream needed for the job simply by applying pressure on the lever arm–from a soft spray to a strong, steady stream. This provides a convenient control that immediately shuts-off the water when the lever arm is released. The long rubber grip feels comfortable in the hand and the mechanical ease of the trigger spray assures a better cleaning with a lot less effort and less hand fatigue.

Available options for both series are:

- Bronze or all Stainless Steel construction
- Renewable and replaceable rubber covers in Black, White, and Red
- Comfortable, long handle grip for whole hand placement
- Stainless steel seat design prevents nozzle seat leakage
- Low Flow Option is available
- One Year Limited Warranty

| NOZZLE FLOW TEST | | |
|---|---|---|
| WATER PRESSURE PSI | FLOW (GPM) | |
| | STANDARD NOZZLE | LOW FLOW NOZZLE |
| 20 | 3 ¼ | 2 ¼ |
| 30 | 4 ¼ | 2 ¾ |
| 40 | 5 ⅛ | 3 ¼ |
| 50 | 5 ⅞ | 3 ¾ |
| 60 | 6 ¾ | 4 ⅛ |
| 70 | 7 ½ | 4 ½ |
| 80 | 7 ¾ | 4 ⅞ |
| 90 | 8 ¼ | 5 |
| 100 | 9 | 5 ⅛ |

Maximum water temperature: 200°F (93°C)
Maximum working pressure: 150PSI

**Note: Not suitable for steam service**

A CERTIFIED QUALITY PRODUCT • A CERTIFIED QUALITY PRODUCT • A CERTIFIED QUALITY PRODUCT
1 YEAR
LIMITED
WARRANTY

**M-70**
Bronze

**S-70**
Stainless Steel

RUBBER COVER - BLACK

RUBBER COVER - RED

RUBBER COVER - WHITE

Strahman®
WASHDOWN EQUIPMENT

# M-70 & S-70 SERIES

## Heavy Duty Water Saver Spray Nozzles

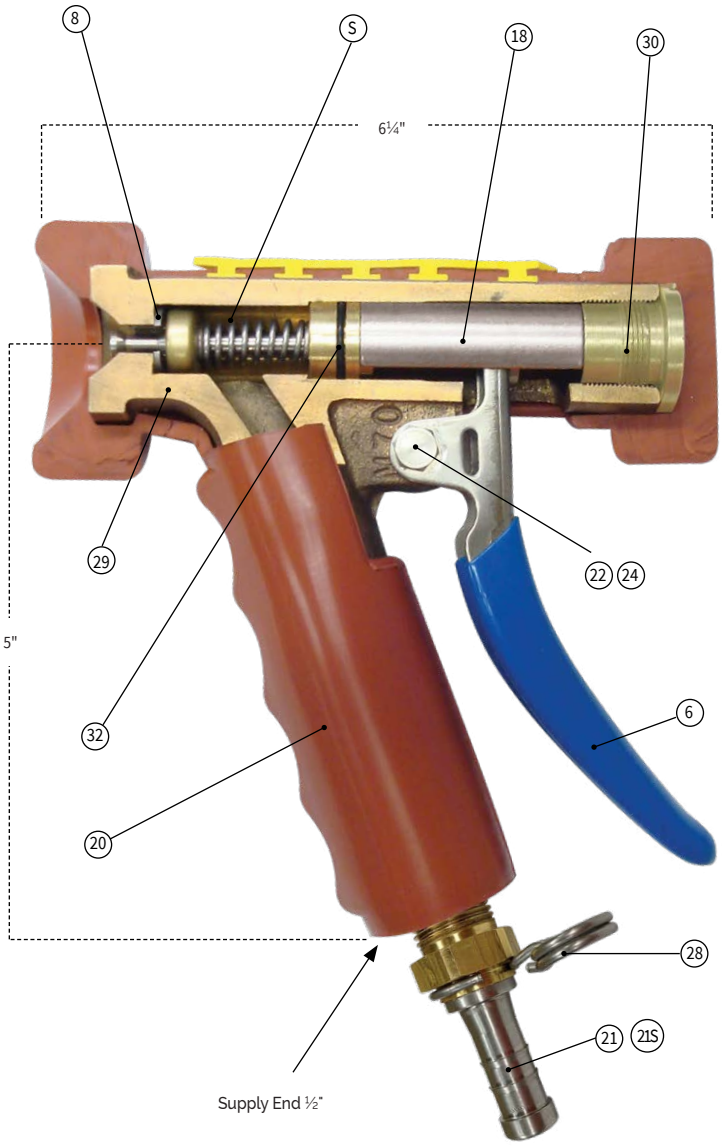


DIMENSIONS: 6¼"W X 5"H
WEIGHT: 2¾ LBS. (W/O ADAPTER)

| ITEM NO. | DESCRIPTION | M-70 BRONZE ORDER No. (MATERIAL) | S-70 STAINLESS STEEL ORDER NO. (MATERIAL) |
|---|---|---|---|
| MAIN BODY PARTS LIST | | | |
| 8 | SEAT | WSSEAT (SS 303) | WSSEAT (SS 303) |
| | SEAT FOR LOW FLOW | WSSEATLF (SS 303) | WSSEATLF (SS 303) |
| 18 | NOZZLE CAGE (SET OF 6) | WSCASS (SS 304) | WSCASS (SS 304) |
| 30 | LOCK SCREW | LSCRBR (BR C3600) | LSCRSS (SS 303) |
| 22 | LEVER ARM BUSHING | LARMBU (NYLON) | LARMBU (NYLON) |
| 24 | LEVER ARM SCREW | WSLSCRP (SS 303) | WSLSCRP (SS 303) |
| | LEVER ARM NUT | WSLNUT (SS 303) | WSLNUT (SS 303) |
| 6 | LEVER ARM - BLUE | WSLARMBLUE (SS 304) | WSLARMBLUE (SS 304) |
| 29 | MAIN BODY | WSM70BODY0005 (BRASS C83600) | S70BDBUSEATSS (SST 304) |
| 20 | NOZZLE COVER - BLACK | M70COVRBLACK | M70COVRBLACK |
| | NOZZLE COVER - RED | M77COVRRED | M77COVRRED |
| | NOZZLE COVER - WHITE | M75WCOVR | M75WCOVR |
| ADAPTER PARTS | | | |
| 21S | ¾" FGHT SWIVEL HOSE | G075BR (BR36000) | SG0075SS (SS 303) |
| | ½" BARB SWIVEL ADAPTER | SWADAP0500BR (BR36000) | SWADAP0500SS (SS 303) |
| | ⅝" BARB SWIVEL ADAPTER | SWADADAP0063BR (BR36000) | SWADADAP0063SS (SS 303) |
| | ¾" BARB SWIVEL ADAPTER | SWIVADAP0075BR (BR36000) | SWIVADAP0075SS (SS 303) |
| 28 | LOCK RING | WSLRNG (SS302) | WSLRNG (SS302) |
| 21 | ¾" FGHT RIGID ADAPTER | WSADAPTERCOM-PLETE0003 (BR36000) | G050SS (SS 303) |
| | ½" BARB RIGID ADAPTER | BARB0050BR (BR36000) | |
| | ⅝" BARB RIGID ADAPTER | BARB0063BR (BR36000) | BARB0063SS (SS 303) |
| | ¾" BARB RIGID ADAPTER | BARB0075BR (BR36000) | BARB0075SS (SS 303) |
| REPLACEABLE CARTRIDGE UNIT | | | |
| S | REPLACEABLE CAR-TRIDGE | M70CARTBR (BR & SSTL) | S70CART (SSTL) |
| 31 | STEM GUIDE (INSTALLED WITH CARTRIDGE) | WSSGUIDBR (BR & SSTL) | WSSGUISS (SSTL) |
| 32 | BODY SEALING O RING (INSTALLED W/CARTR.) | ORNG018EA | ORNG018EA |


STRAHMAN GROUP
PRECISION AND PERFORMANCE

STRAHMANGROUP.COM

WORLD HEADQUARTERS
2801 BAGLYOS CIRCLE, BETHLEHEM, PA 18020
P: +1 484.893.5080 F: +1 484.893.5099
E: STRAHMAN@STRAHMAN.COM

USA | FRANCE | GERMANY | HONG KONG | CHINA